

BC

series 10



Field shredders
BC 24 – 27 - 30

P R O D U C T I N F O R M A T I O N



BC series 10 shredders are intended for shredding intermediate cultivations or crop residues. They can also be used on set-aside and pasture land. The target customers are individual farms or mixed crop or breeding farms looking to combine quality shredding and an attractive price.

These redesigned shredders are available in working widths of 2.40m, 2.70m and 3.00 m.



Design dedicated to faultless work


Featuring rounded shapes with no sharp edges, the upper casing of the BC has been designed to allow intake and shredding of large volumes of residues. Ideal for ensuring a seedbed free of debris that could disturb seed emergence!



Adapted to all terrains

The height control is ensured by two semi-pivoting wheels attached to the casing (tyres 7.00*12).

Also available as standard: a roller with removable ends (220 mm) adjustable to six positions.

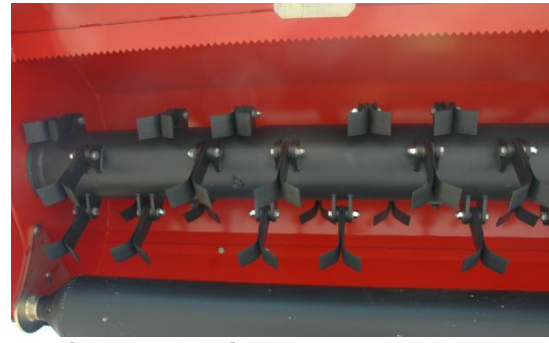

Aggressive shredding

The BC is also fitted with a new generation of very aggressive rotors for shredding all types of residues. They are equipped with numerous very long tools (13 holders/meter) mounted on treated bushes. Aggressiveness is the key word.



A drive designed to last

The drive is ensured by two Powerband XPB 2-strand belts 2 brins. It provides optimum power transmission and **frequent tension control**.

For easy maintenance, the guard can be removed by taking out one bolt!

Technical specifications	BC 24	BC 27	BC 30
Attachment	3-pt, cat II		
Working width (m)	2.33	2.69	2.95
Overall width (m)	2.55	2.94	3.19
PTO speed (min ⁻¹)	540 / 1000*		
Minimum power requirement kW (hp)	44 (60)	57 (71)	57 (78)
Maximum power requirement kW (hp)	92 (125*)		
Mechanical side offset (mm)	400	Central attachment	
Free wheel	Integrated in the gearbox		
Number / Type of belts	1 / Powerband XPB 3 strands	1 / Powerband XPB 4 strands	
Rotor diameter (mm)	680		
Rotor speed (min ⁻¹)	1833/1960		
Tool speed (m/s)	65.2/69.7		
Number of hammer knives	32	36	40
Number of universal knives	64	72	80
Height control	Semi-pivoting wheels 7.00*12 or roller with removable ends (Ø220)		
Weight empty (kg)	850	920	1000

* 1000 min⁻¹